









From concrete to grass, the LR50 can tackle all types of urban terrain with ease

- Parks
- Sidewalks
- Bike & pedestrian lanes
- Parking lots

- Curb side
- Alleys
- Pathways
- Alongside buildings



LR50 is the perfect allterrain litter solution for

- Cities & municipalities
- Outdoor cleaning contractors
- Airports & seaports
- Transit authorities
- Healthcare services
- Distribution centers
- Shopping malls
- Educational & sports facilities
- Manufacturing facilities
- Amusement parks
- Casinos
- Military
- Correctional facilities







Ergonomic 6-position robotic joystick allows effortless displacement of the boom














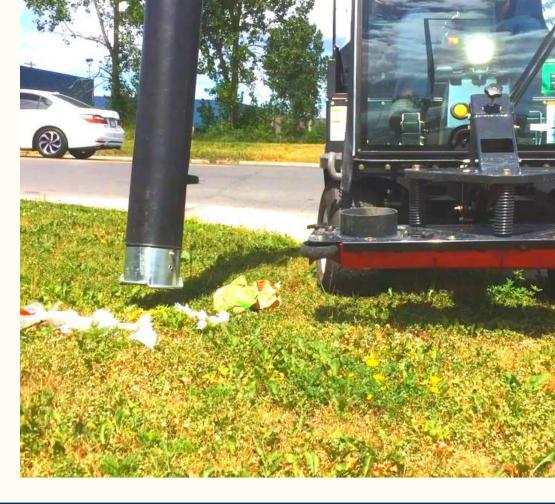









Built to suit your needs

Configure the LR50 according to your specific requirements

- 48 in. (1219 mm) vacuum head
- Retractable wander hose
- Litter collector bags or bagless debris system (Kevlar bin)
- Water mist system (additional dust control)
- Enclosed cab with heated or non-heated windshield and vinyl doors
- Heated seat
- Floor-mounted cab heater
- Fan for operator comfort
- Rear-view camera
- Tire flatproofing
- Fire extinguisher



Key Attributes


- Robotic vacuum arm with 6-position joystick makes litter picking easy and injury free;
- Closed cabin (vinyl doors) with climate control options for operator comfort;
- Productivity 6x faster than manual litter picking;
- Collects litter dry, humid or wet;
- Effortless litter removal using 48 in. (1219 mm) wide vacuum head;
- 15 ft. (4.57 m) retractable wander hose for hardto-reach areas;
- A CDL permit is not required to operate this machine;
- Fully street legal lighting;
- 10 to 12 year lifespan;
- OEM spare parts shipped within 48 hours;
- Madvac has a 35+ years track record of success
 - when your machine is due for replacement we'll still be around.


To request a quote www.madvac.com
Diesel/Gas -> LR50 -> Request a quote







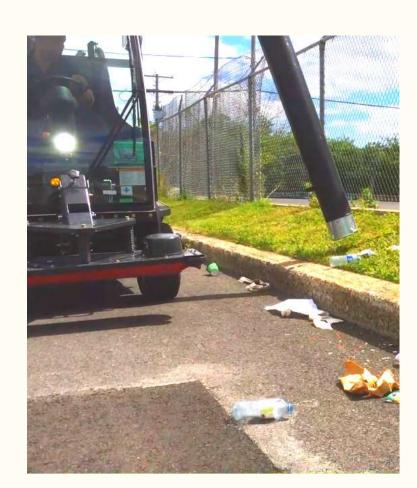

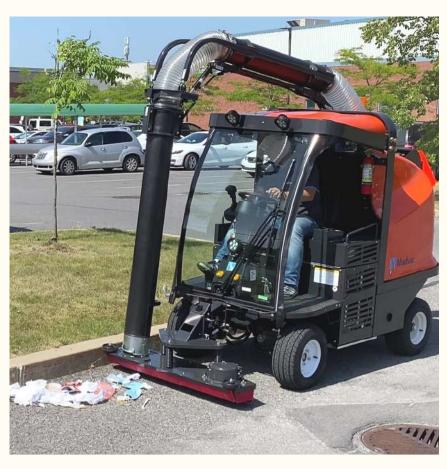

Madvac LR50

Data & Performance Information

Fuel tank 10.2 gal. (39 L) 12.5 gal. (47 L) Hydraulic system Litter capacity 75 gal. (284 L) Engine Data Model Kubota Diesel D1105-E4B (EPA Tier 4 Final) Displacement 68.53 cu.in. (1123 cc) Gross rated power 24.8 hp (18.5 kW) @3200 rpm Legislation compliance EPA Tier 4 Final Air cleaner 2-stage Donaldson with restriction indicator

Litter Collection System	
Type	Straight-through system compacts litter at 2:1 ratio
Container construction	16 gauge powder-coated steel
Vacuum hose	7 in. (178 mm)
Wander hose	Diameter: 6 in. (152 mm); length: 15 ft. (4.57 m)

Frame/Body

Capacities

- Heavy gauge steel body on a welded 0.25 in. (6.35 mm) structural steel frame
- Electrostatic powder-coated paint

Dimensions (*base model)

Width	48 in. (1219 mm)
Length	99 in. (2515 mm)
Height	100 in. (2540 mm)
Wheelbase	69 in. (1753 mm)
Ground clearance	10 in. (254 mm)





Proud manufacturer of the Madvac product line

Telephone:

1-855-651-0444
 (toll free - US/Canada)

• 1-450-651-0444 (international)

Fax: 450-651-0447
Email: info@exprolink.com

Address: 2170 Rue de la Province

Longueuil QC Canada J4G 1R7

Website: www.madvac.com
Sourcewell (US) and Canoe
(Canada) contract vendor
number: 093021-EXP

Vacuum System	
Vacuum rating	1800 CFM
Controls	
Steering	Power assisted
Motion control	Heavy duty hydrostatic
Traction	
Drive	Front wheel drive
Forward speed	12 mph (19 km/h)
Tires (all 4 wheels)	Regular 20.5 in. (521 mm);
	turf 20 in. (508 mm)
Brakes	Front hydrostatic brake;
	rear mechanical disc parking brake
Gradeability	11.3 degree (20%) with full & empty
	hopper
Curb weight	2910 lbs (1320 kg)
Suspension	
Front	Leaf spring

Leaf spring



Rear



